

TERRA BLOCKER



The HVM Terra Blocker has been successfully impact tested to the International IWA14 specification stopping 7.2t @ 80kph (50mph), resulting in zero penetration.

- Foundation depth of 900mm
- Embedment depth of 800mm – type C
- Widths up to 5000mm

Tested dimensions: width 3000mm, lift height 1000mm

BENEFITS & FEATURES

- Impact tested to the International IWA 14 with 7.2t @ 80kph (50mph) – resulting in zero penetration
- Designed for ease of installation and maintenance
- Hydraulically operated, three phase supply
- Finish: Shotblasted, hot dip galvanised, primed and finished with a final coat of polyurethane paint.
- Lifetime Paint; Anti-skid resistant coating on top plate
- Instantly reversible, 100% duty rated motor
- Safety skirt to prevent potential trapping areas
- Control cabinet recommended to be installed within 10 metres of unit

OPERATING SPEED

- Typical speeds of 4-6 seconds *
- EFO (extra fast operation) in up to 2-3 seconds (depending on configuration)

OPTIONS

- Accumulator or manual hand pump allow a number of operations in power failure mode
- In the event of Power Failure options of Fail Secure (remain in the raised position) or Fail Safe (remain in the lowered position)
- High Security Cabinet
- Can be interfaced to any access control systems
- 100/200mm Traffic Light System

SAFETY

- Vehicle detector loops
- Safety photocell beams

CIVIL REQUIREMENTS

Based on a 3000mm width blocker (millimetres)
L: 4000 × W: 2200 × D: 900

Foundation Depth 900mm, Embedment depth 800mm

Control Cabinet Foundation (millimetres)
L: 800 × W: 800 × D: 300


Note: Power and control wiring ducts may be required

ELECTRICAL REQUIREMENTS **

- Three Phase Supply

* Depending on configuration

** This is subject to a risk assessment to ensure the automatic equipment complies to BS EN 12453

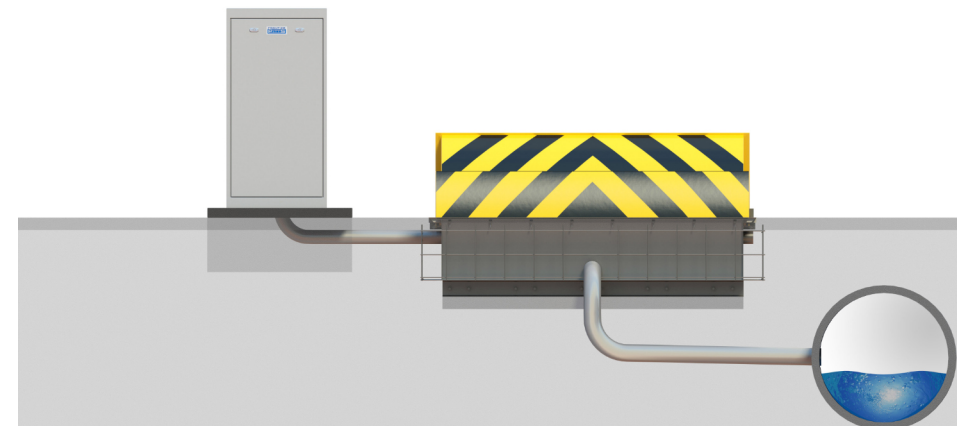

PSSA
Verification Scheme