

TERRA UNIVERSAL BOLLARD IWA 14 7.2t @ 80 kph




Tested to the IWA-14 standard, the Terra Rising Bollard stops a 7.2-ton vehicle at 80 kph, offering 360° VBIED protection. Its hydraulic mechanism ensures smooth operation, with 1200 mm spacing for compliance. Standard features include push-button controls and a Traffic Light System for efficient functionality.


- **Terra Universal Bollard IWA 14 7.2t @ 80kph**
- **Finish: Stainless steel Clad**
- **Fully Automatic Hydraulically driven**
Tested dimensions: lifted height 1000mm

BENEFITS & FEATURES

- Successfully impact tested to IWA 14 7.2t @ 80kph
- IWA 14 Classification Code: V Rising Bollard V/7200[N2A]/80/90:6.3
- Outer Diameter 245 (without sleeves) or 255 with stainless steel
- Easy glide, hydraulically driven
- Outstanding 360° Hostile Vehicle Mitigation protection from the threat of VBIED's (vehicle borne improvised explosive devices)
- Designed to complement our Planet range of Static Bollard heights and diameters; interchangeable sleeves are fitted to the inner bollard core, creating a versatile and stylish perimeter protection solution.
- 30% less steel than its predecessor with a visibly reduced footprint & attractive hexagonal plate
- Designed for ease of installation with a simple fabric mesh pocket.
- Designed for ease of maintenance
- Instantly reversible, 100% duty rated motor
- Control cabinet recommended to be installed within 10 metres of unit
- No external re-bars required

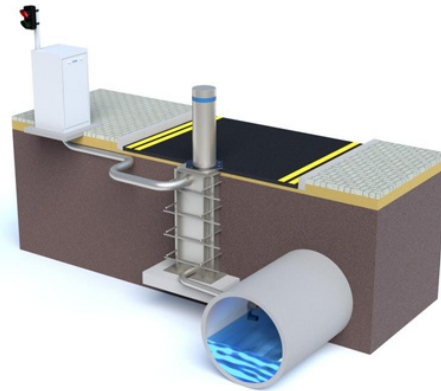


FINISH OPTIONS



Polyester Powder
Coated Sleeves




Polyurathane
Coated Finish




Satin Polished
Stainless Steel

TOP DESIGN OPTIONS



Bollard Painted Finish
Only



Bollard and Painted Flat
top Banding

OPTIONS

- Accumulator or manual hand pump allow a number of operations in power failure mode
- In the event of Power Failure options of Fail Secure
- High Security Cabinet
- Can be interfaced to any access control systems
- 200mm LED Traffic Light System 24V DC Red / Green



SAFETY

- Vehicle detector loops
- Safety Photocell Beams, Light Curtain, Ultra-sonic Sensors and Lasers
- Traffic light 200mm LED
- Stop Button



ELECTRICAL REQUIREMENTS*

Three Phase Supply

415V @ 50HZ
Depending on configuration

This is subject to a risk assessment to ensure the automatic equipment complies to BS EN 12453



OPERATING SPEED

- Typical speeds of 4-6 seconds
- EFO (extra fast operation) in up to 1-2 seconds



CIVIL REQUIREMENTS

Bollard Foundation

L: 1200 x W: 1200 x D: 1515
Note: Power and control wiring ducts may be required

Control Cabinet Foundation (millimetres)

Cabinet Foundation

L: 800 x W: 800 x D: 300

FRONTIER
PITTS
MIDDLE EAST



VISIT US:
SCAN QR CODE

Frontier Pitts Middle East LLC
Office 1301, Building C88, Commercial Tower A, 15 Baghdad St,
Abu Dhabi United Arab Emirates
Mobile: **00971 504256478** | Office: **00971 26212272**
Email: **sales@frontierpitts.ae** | Website: **www.fpgulf.com**